
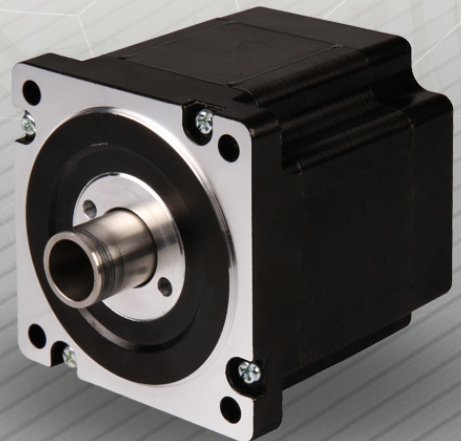




DINGS'

Precision Motion Specialist

HOLLOW SHAFT STEPPER MOTOR PRODUCT CATALOG



DINGS' provides 8 different sizes of Hollow shaft stepper motors from 14mm to 86mm.

Each size has multiple stack lengths. Single or dual shaft is standard but customized shaft options are also available. In addition hollow shaft encoders are available.

Customers are able to use hollow shaft motor to let something go thru hollow shaft like suction valve, cables or pumps especially pick & place application, electronics picker module or other applications.

Hollow shaft motor enables customers to design this kind of pick-up module in very compact design and small size of hollow steppers for example NEMA 6, NEMA8 or NEMA11, it can reduce total weight of picker module since light weight of motors.

For better positioning, lots of customers require closed loop function of hollow shaft motors and DINGS' has various hollow shaft type of encoders so it can be very helpful to realize light weight of motor and encoder package for higher accuracy of positioning.



Hollow Shaft Stepper M

CONTENTS

Part number construction

Product overview

Size 6 · 14 mm

Size 8 · 20 mm

Size 11 · 28 mm


Size 14 · 35 mm

Size 17 · 42 mm

Size 23 · 57 mm


Size 24 · 60 mm

Size 34 · 86 mm

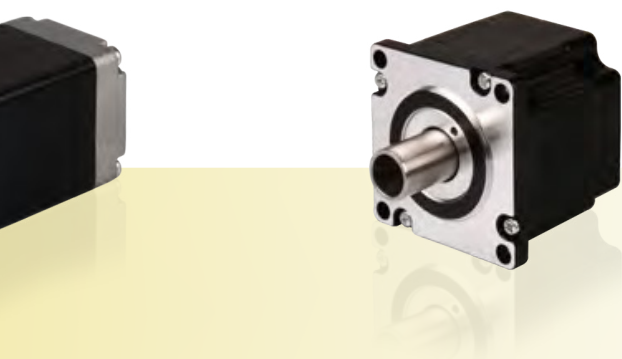

Motor

Part Number Construction

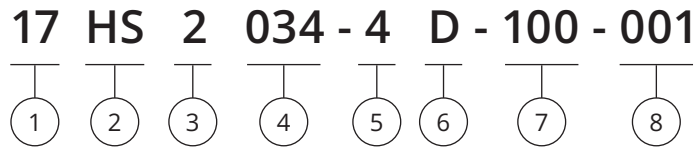

① Motor Size

Motor Size (mm)	14	20	28	35	42	57	60	86
Motor Size (NEMA)	6	8	11	14	17	23	24	34

② Motor Type

HS = Hollow Shaft Step

③ Motor Step Angle

2 = 2 phase with 1.8°

4 = 2 phase with 0.9°

④ Motor Length

034 = 34mm

⑤ Number of Lead Wires

4 = Bi-Polar (4 flying leads)

6 = Uni-Polar (6 flying leads)

⑥ Shaft Configuration

D = Double Shaft

S = Single Shaft

*For shaft customization, please contact DINGS'

⑦ Rated Current

XXX = Rated current ×100 (A)

⑧ Customer Sequence Number

Example

Naming code 17HS2034-4D-100-001

Description Size 42 mm
 Hollow shaft stepper motor
 Step angle 1.8°
 Motor length 34 mm
 4 Flying leads
 Dual shaft
 Rated current 1.0A
 Customization sequence 001

Product Overview

Size (mm)	Motor length (mm)	Holding torque (N·m)	Inner holes (mm)	Power consumption (W)
6 (14*14)	32	0.005	2.5	2
8 (20*20)	28	0.014	3	2.4
	38	0.02	3	4
11 (28*28)	33	0.053	5	4.2
	45	0.1	5	7.5
14 (35*35)	33.6	0.15	8	5.7
	45.6	0.32	8	9.1
17 (42*42)	34.1	0.25	8	7
	48.1	0.48	8	13
23 (57*57)	45	0.8	12	13
	65	1.6	12	25
24 (60*60)	47	0.9	12	16.2
	68	1.9	12	19.2
34 (86*86)	76	4.5	16	31

Size 6 (14mm) Series


The size 6 [14mm] Hollow Shaft Stepper Motor is the smallest hollow shaft motor from DINGS'. It has Max. 0.005N·m of holding torque. For special windings or customization of shaft, please contact DINGS' for further information.




Motor Characteristics

Motor No.	Rated voltage (V)	Current (A _{RMS})	Resistance (Ω)	Inductance (mH)	Holding torque (N·m)	Detent torque (N·m)	Motor length (mm)
06HS2030	6.6	0.3	23	4.0	0.005	0.001	32

Dimensional Drawings

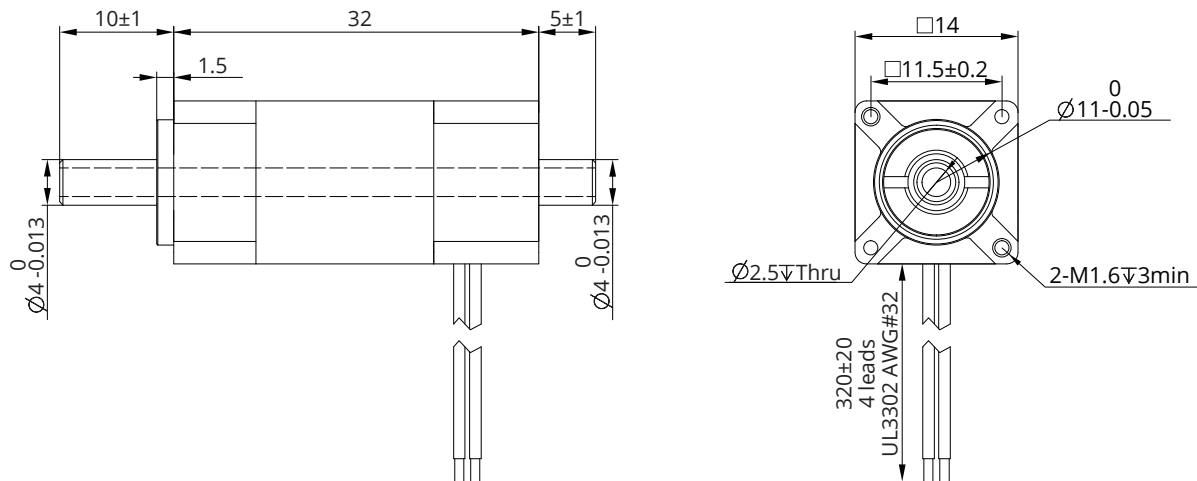

Torque Performance Curves

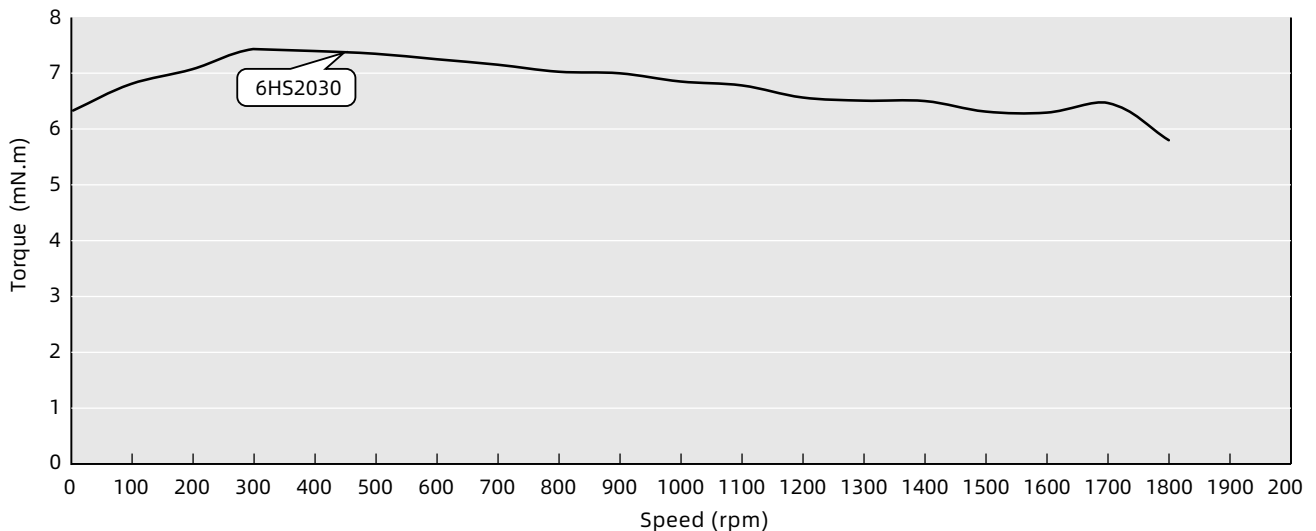

TEST CONDITION

Testing Voltage: 24Vdc, Driver Model: DS-OLS8-FRS4 bipolar, chopper driver at rated current (rms). Motor's thrust will be changed with different voltage and driver. 50% thrust margin is recommended.

Size 8 (20mm) Series


The size 8 [20mm] Hollow Shaft Stepper Motor has Max. 0.02N·m of holding torque.
For special windings or customization of shaft,
also hollow type of encoder assembly,
Please contact DINGS' for further information.




Motor Characteristics

Motor No.	Rated voltage (V)	Current (A _(RMS))	Resistance (Ω)	Inductance (mH)	Holding torque (N·m)	Detent torque (N·m)	Motor length (mm)
8HS2028	2.55	0.5	5.1	1.5	0.014	0.002	28
8HS2038	4.4	0.5	8.8	2.7	0.020	0.004	38

Dimensional Drawings

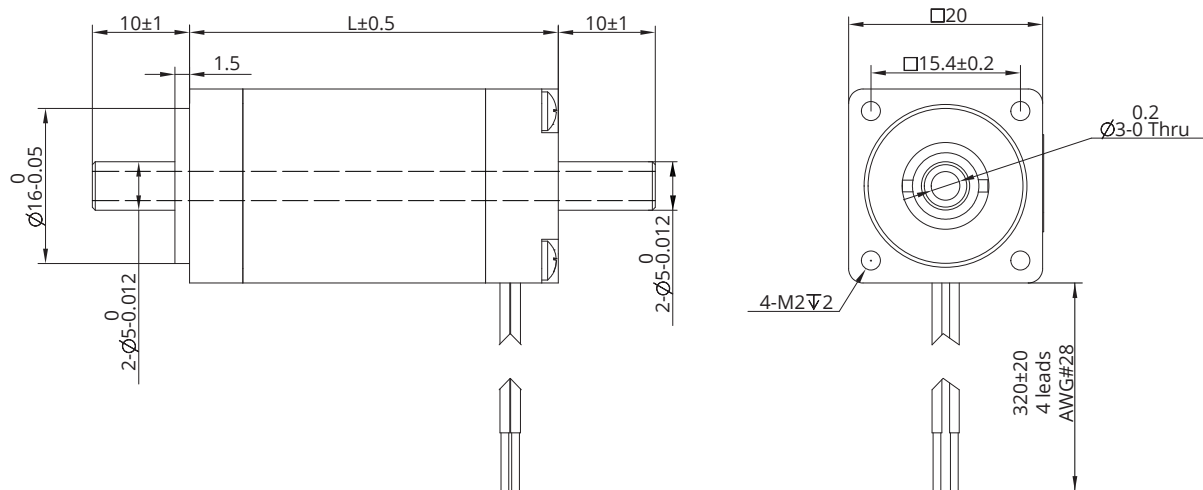

Torque Performance Curves

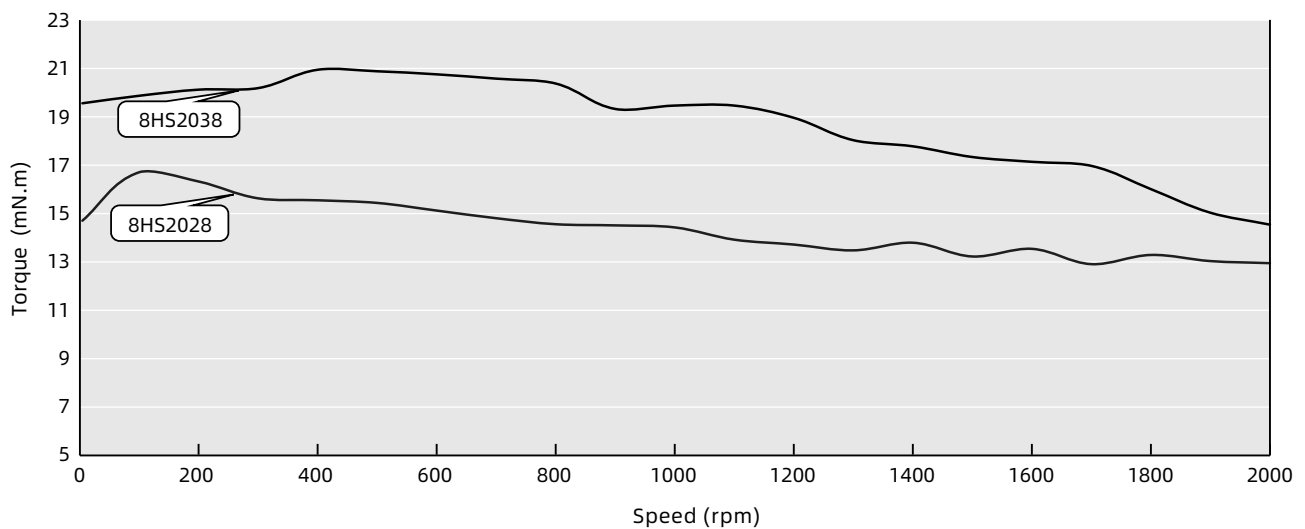

TEST CONDITION

Testing Voltage: 24Vdc, Driver Model: DS-OLS8-FRS4 bipolar, chopper driver at rated current (rms).
Motor's thrust will be changed with different voltage and driver. 50% thrust margin is recommended.

Size 11 (28mm) Series


The size 11 [28mm] Hollow Shaft Stepper Motor has Max. 0.1N·m of holding torque. For special windings or customization of shaft, also hollow type of encoder assembly, Please contact DINGS' for further information.




Motor Characteristics

Motor No.	Rated voltage (V)	Current (A _{RMS})	Resistance (Ω)	Inductance (mH)	Holding torque (N·m)	Detent torque (N·m)	Motor length (mm)
11HS2033	2.1	1	2.1	1.5	0.053	0.003	33
11HS2045	4.1	1	4.1	4	0.1	0.004	45

Dimensional Drawings

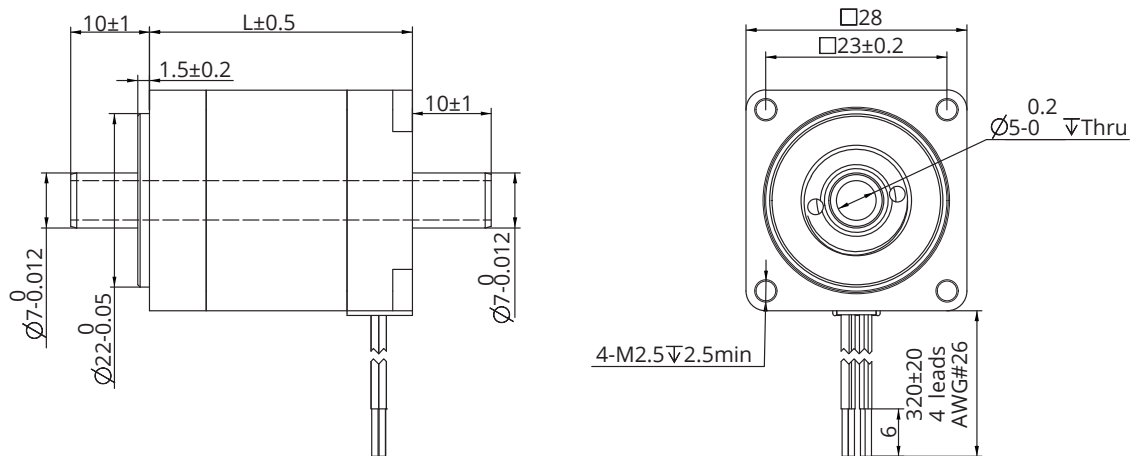

Torque Performance Curves

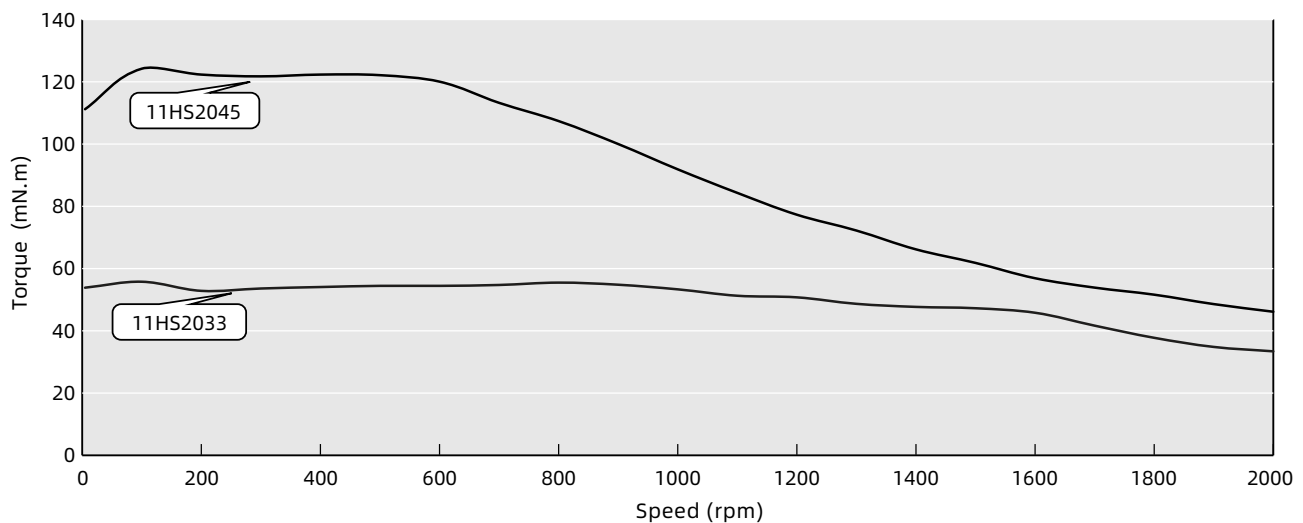

TEST CONDITION

Testing Voltage: 24Vdc, Driver Model: DS-OLS8-FRS4 bipolar, chopper driver at rated current (rms). Motor's thrust will be changed with different voltage and driver. 50% thrust margin is recommended.

Size 14 (35mm) Series


The size 14 [35mm] Hollow Shaft Stepper Motor has Max. 0.32N·m of holding torque.
For special windings or customization of shaft,
also hollow type of encoder assembly,
Please contact DINGS' for further information.




Motor Characteristics

Motor No.	Rated voltage (V)	Current (A _(RMS))	Resistance (Ω)	Inductance (mH)	Holding torque (N·m)	Detent torque (N·m)	Motor length (mm)
14HS2033	3.5	1	3.5	3.6	0.15	0.006	33.6
14HS2045	6	1	6	7.8	0.32	0.01	45.6

Dimensional Drawings

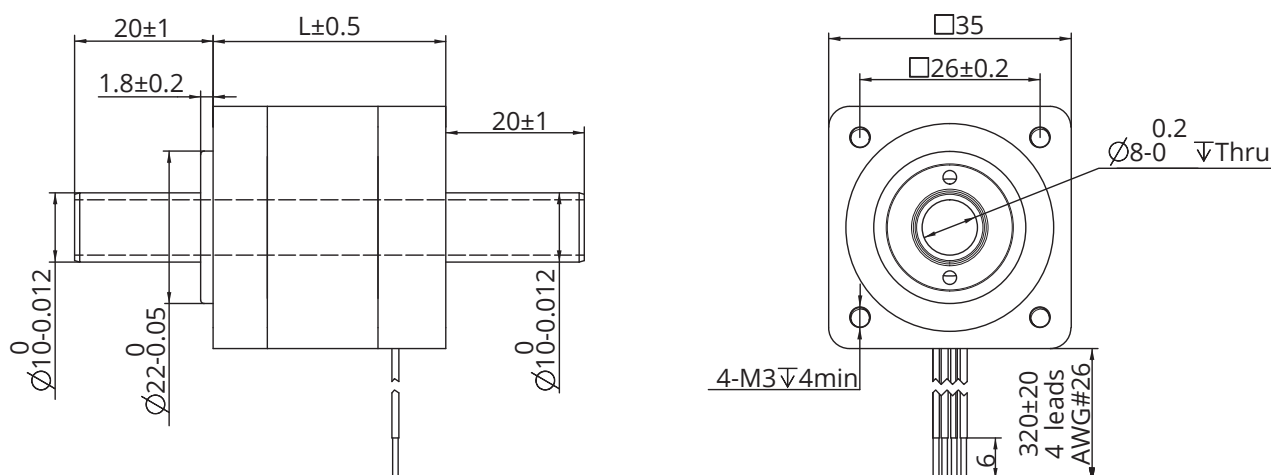

Torque Performance Curves

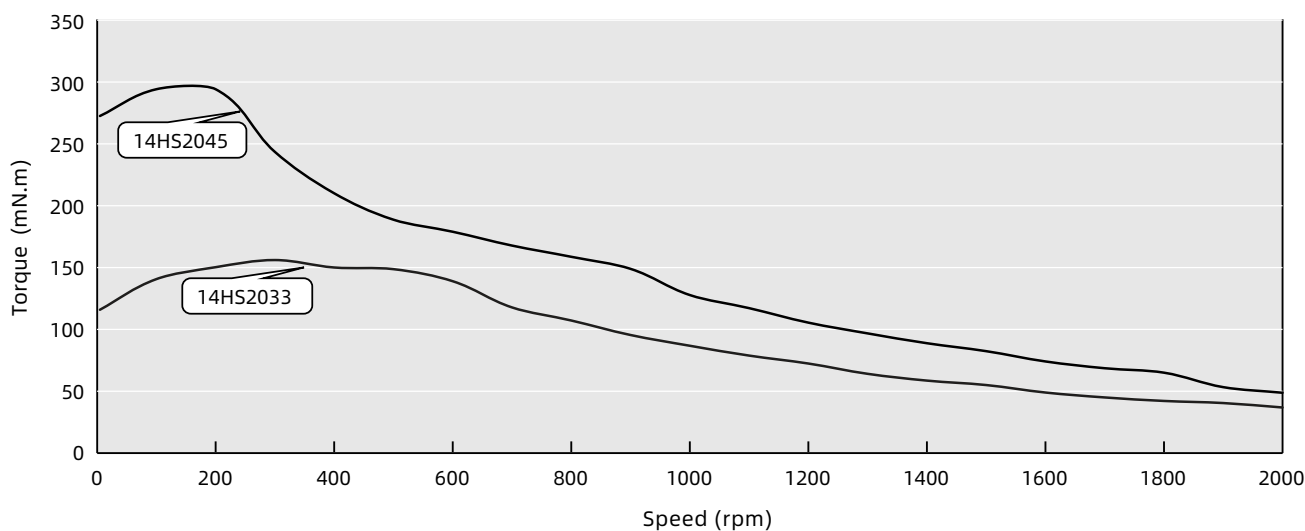

TEST CONDITION

Testing Voltage: 24Vdc, Driver Model: DS-OLS8-FRS4 bipolar, chopper driver at rated current (rms).
Motor's thrust will be changed with different voltage and driver. 50% thrust margin is recommended.

Size 17 (42mm) Series


The size 17 [42mm] Hollow Shaft Stepper Motor has Max. 0.48N·m of holding torque. For special windings or customization of shaft, also hollow type of encoder assembly, Please contact DINGS' for further information.




Motor Characteristics

Motor No.	Rated voltage (V)	Current (A _{RMS})	Resistance (Ω)	Inductance (mH)	Holding torque (N·m)	Detent torque (N·m)	Motor length (mm)
17HS2034	3.8	1	3.6	4.5	0.25	0.014	34.1
17HS2048	2.25	2.5	1	1.8	0.48	0.02D	48.1

Dimensional Drawings

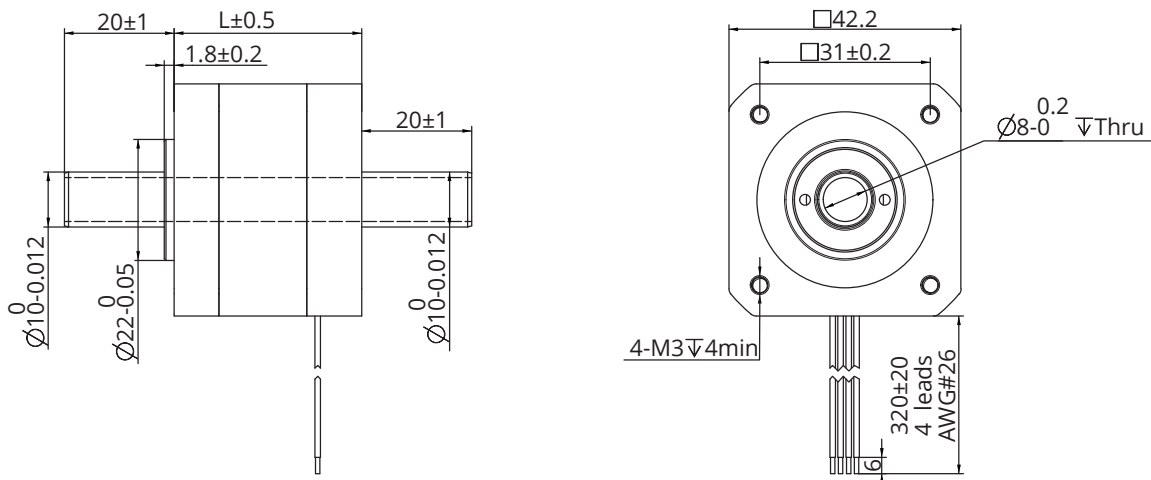

Torque Performance Curves

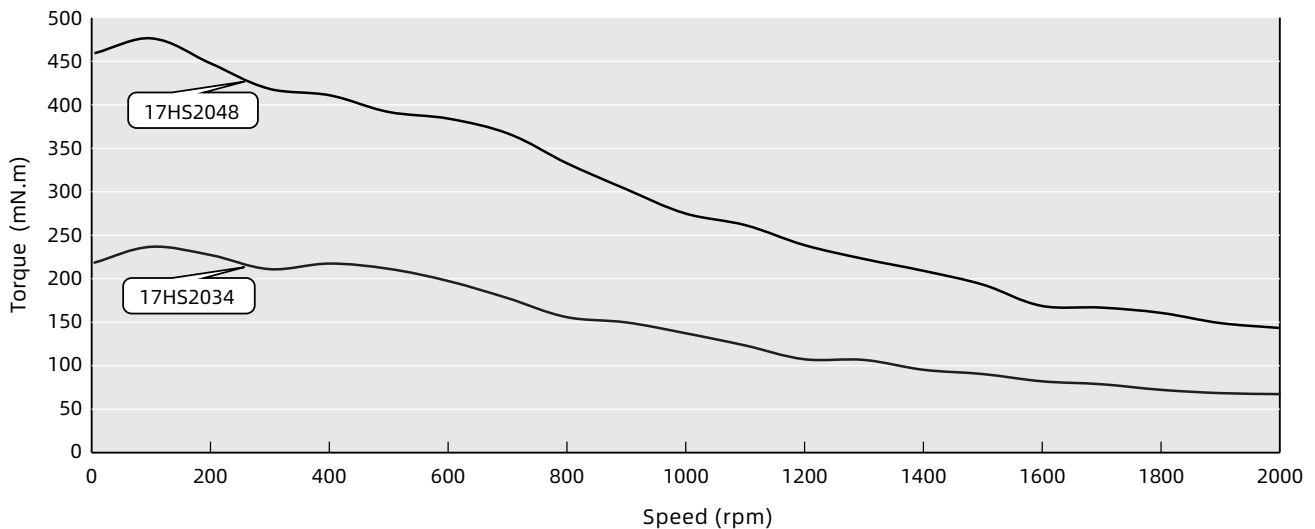

TEST CONDITION

Testing Voltage: 24Vdc, Driver Model: DS-OLS8-FRS4 bipolar, chopper driver at rated current (rms). Motor's thrust will be changed with different voltage and driver. 50% thrust margin is recommended.

Size 23 (57mm) Series


The size 23 [57mm] Hollow Shaft Stepper Motor has Max. 1.5N·m of holding torque.
For special windings or customization of shaft,
also hollow type of encoder assembly,
Please contact DINGS' for further information.




Motor Characteristics

Motor No.	Rated voltage (V)	Current (A (RMS))	Resistance (Ω)	Inductance (mH)	Holding torque (N·m)	Detent torque (N·m)	Motor length (mm)
23HS2045	3.5	2	1.75	4.1	0.8	0.03	45
23HS2065	5	2.5	1.9	5.5	1.5	0.06	65

Dimensional Drawings

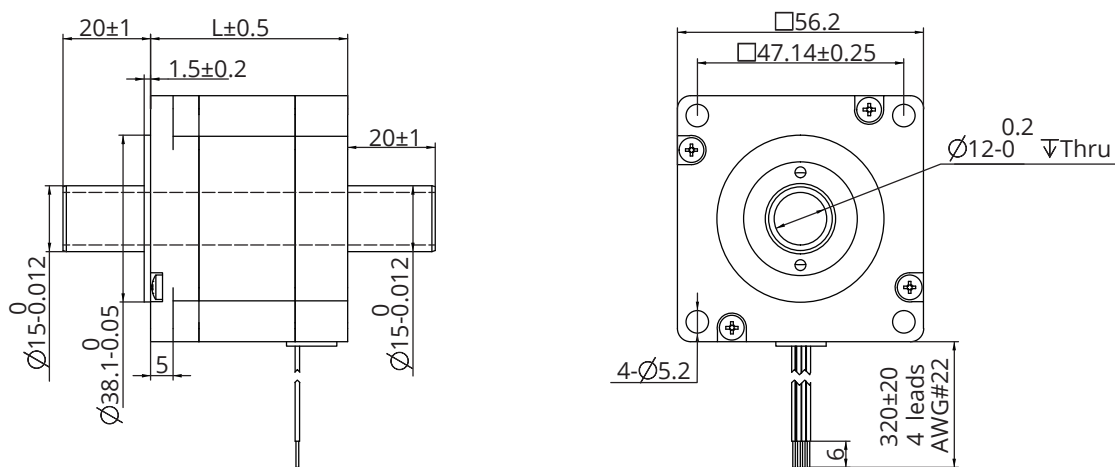

Torque Performance Curves

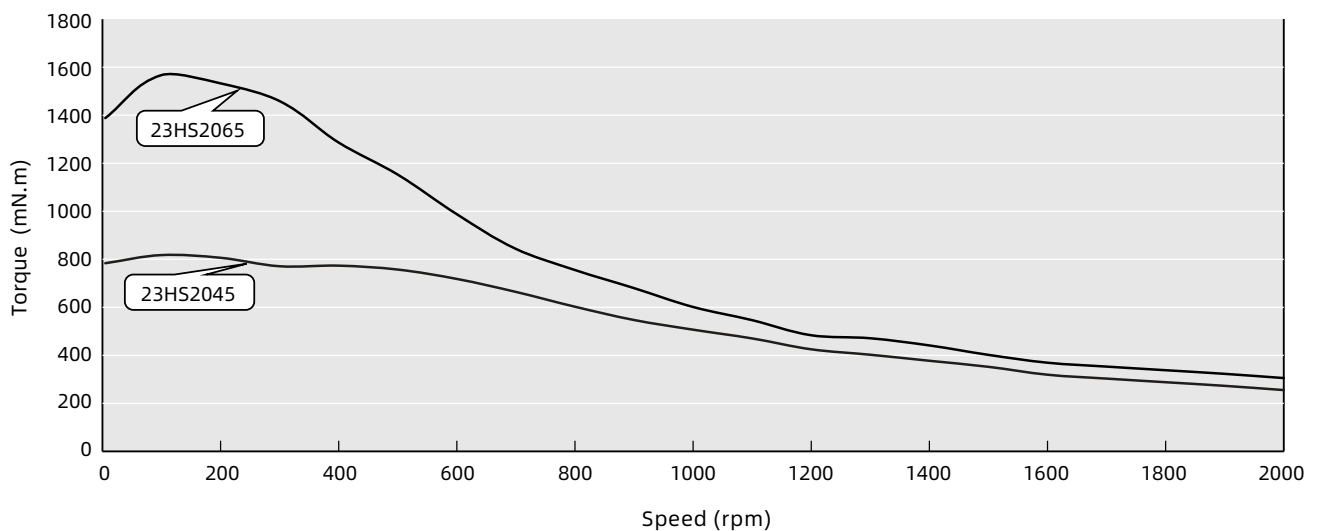

TEST CONDITION

Testing Voltage: 48Vdc, Driver Model: DS-OLS8-FRS4 bipolar, chopper driver at rated current (rms).
Motor's thrust will be changed with different voltage and driver. 50% thrust margin is recommended.

Size 24 (60mm) Series


The size 24 [60mm] Hollow Shaft Stepper Motor has Max. 1.8N·m of holding torque. For special windings or customization of shaft, also hollow type of encoder assembly, Please contact DINGS' for further information.




Motor Characteristics

Motor No.	Rated voltage (V)	Current (A _{RMS})	Resistance (Ω)	Inductance (mH)	Holding torque (N·m)	Detent torque (N·m)	Motor length (mm)
24HS2047	1.52	4	0.4	0.9	0.9	0.03	47
24HS2068	2.4	4	0.6	1.9	1.8	0.06	68

Dimensional Drawings

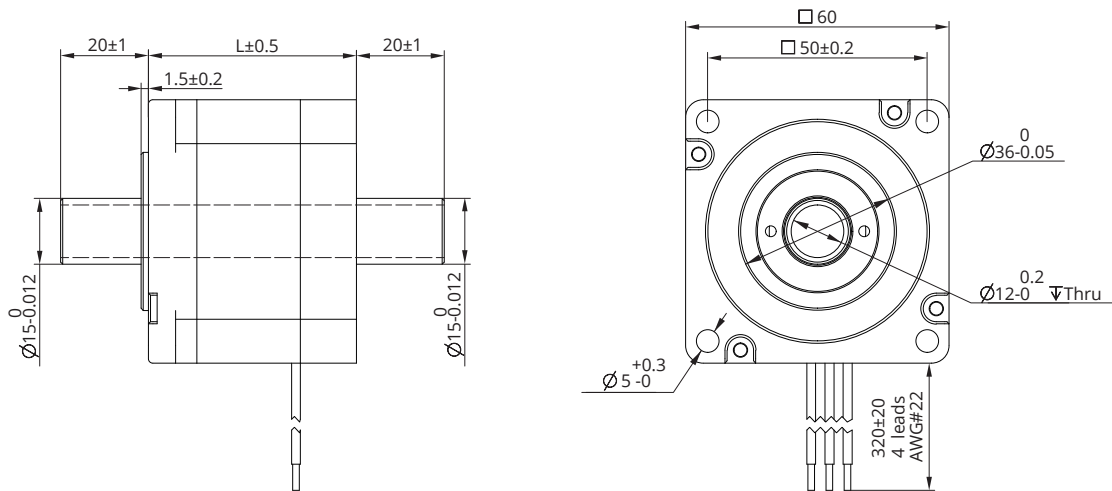

Torque Performance Curves

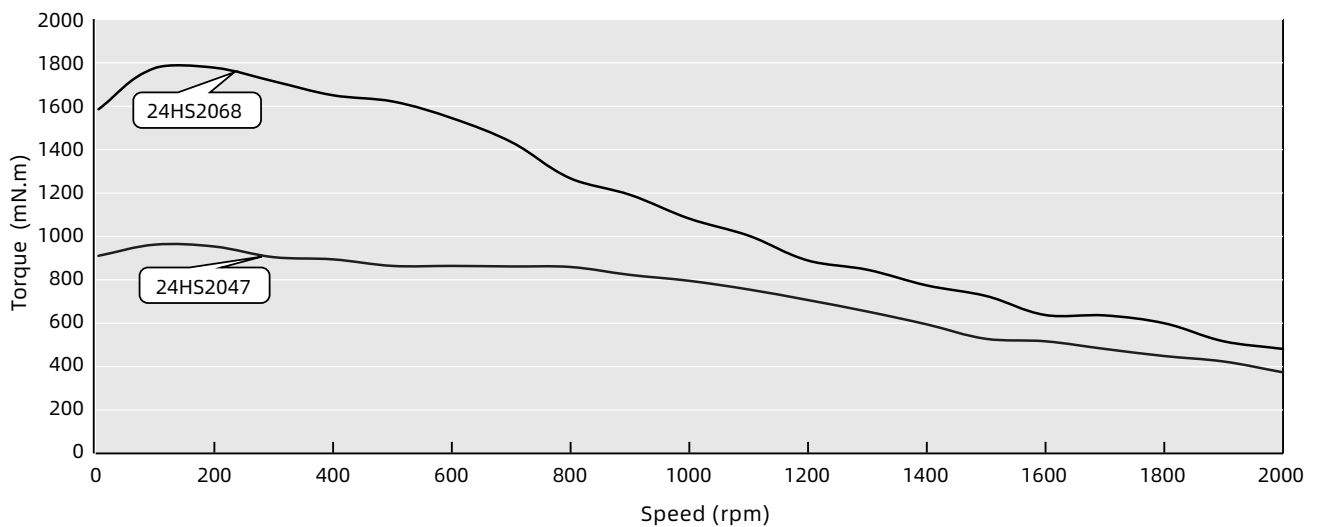

TEST CONDITION

Testing Voltage: 24Vdc, Driver Model: DS-OLS8-FRS4 bipolar, chopper driver at rated current (rms). Motor's thrust will be changed with different voltage and driver. 50% thrust margin is recommended.

Size 34 (86mm) Series


The size 34 [86mm] Hollow Shaft Stepper Motor has Max. 4.5N·m of holding torque.
For special windings or customization of shaft,
also hollow type of encoder assembly,
Please contact DINGS' for further information.




Motor Characteristics

Motor No.	Rated voltage (V)	Current (A (RMS))	Resistance (Ω)	Inductance (mH)	Holding torque (N·m)	Detent torque (N·m)	Motor length (mm)
34HS2076	5.7	3	1.9	15	4.5	0.095	76

Dimensional Drawings

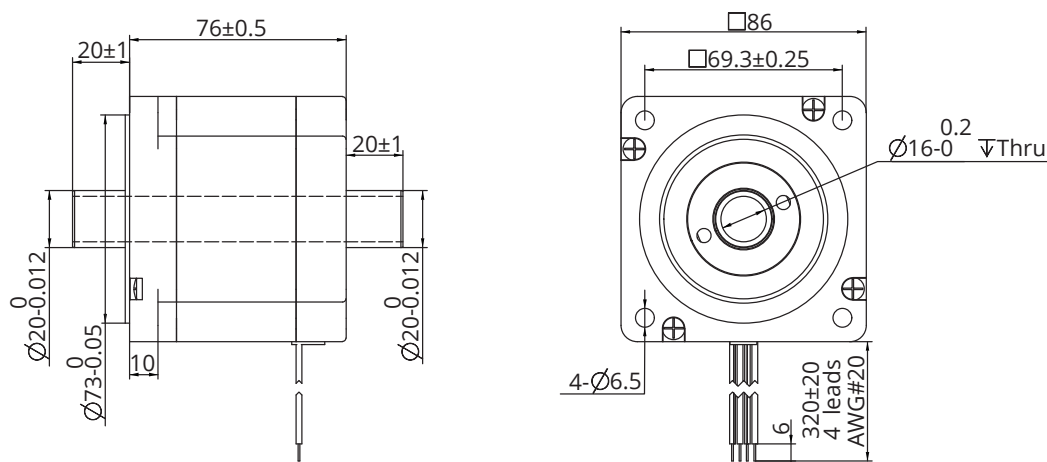

Torque Performance Curves

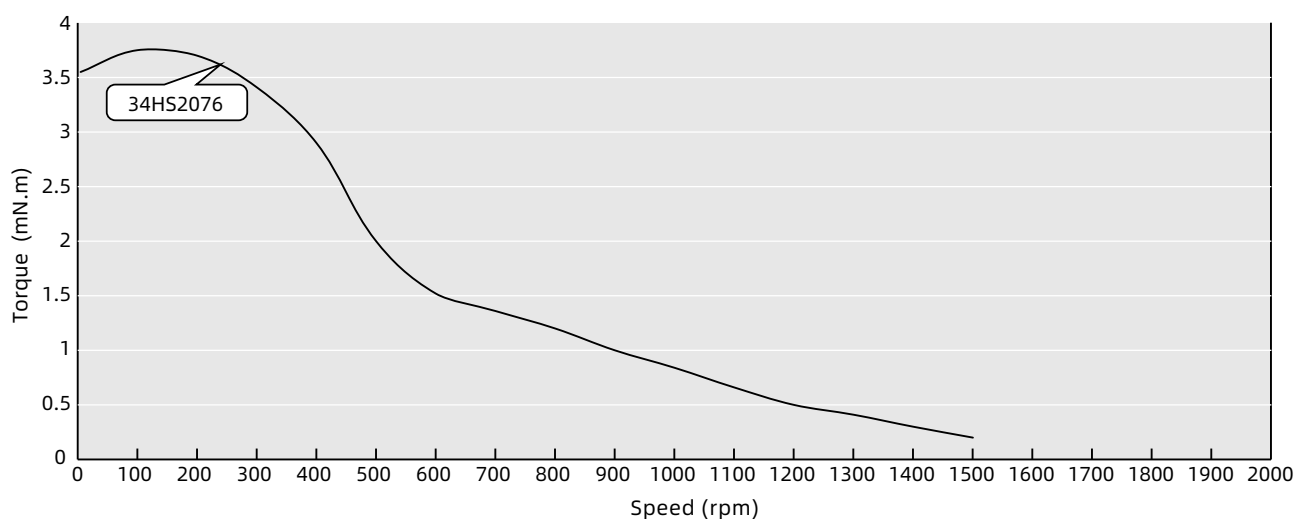

TEST CONDITION

Testing Voltage: 48Vdc, Driver Model: DS-OLS8-FPD bipolar, chopper driver at rated current (rms).
Motor's thrust will be changed with different voltage and driver. 50% thrust margin is recommended.

DINGS'

Precision Motion Specialist

Headquarter , CHINA

Jiangsu DINGS' Intelligent Control Technology Co., LTD

No. 2850 Luheng Road, Changzhou Economic Development Zone, Jiangsu Province, China

Phone : +86-519-85177826

Fax : +86-519-85177807

E-mail : info@dingsmotion.com

www.dingsmotion.com

Shenzhen Office

Room 1105, Block C, CIMC industry demonstration park, Qiaoming Road, Guangming district, Shenzhen City

E-mail : info@dingsmotion.com

International Office

DINGS' Motion USA

355 Cochrane Circle Morgan Hill, CA 95037

Phone : +1-408-612-4970

E-mail : sales@dingsmotionusa.com

www.dingsmotionusa.com

DINGS' Motion Europe

4 Avenue du Grand Trémoutier 44120 - Vertou - France

Phone : +33-(0)6-41-37-80-07

E-mail : sebastien@dingsmotion.com

<http://fr.dingsmotion.com>

DINGS' KOREA Co., Ltd

C-702, 158, Haneulmaeul-ro, Ilsandong-gu, Goyang-si, Gyeonggi-do, Republic of Korea

Phone : +82-31-994-0755

Fax : +82-70-4325-0755

E-mail : daniel@dingsmotion.com

www.dingsmotion.kr

DINGS' JAPAN

101, 2-27-18, Nishi-kojiya, Ota-ku, Tokyo 144-0034 JAPAN

Phone : +81-3-6811-1335

E-mail : tsukahara@dingsmotion.com

www.dingsmotion.com

■ This catalog is the sole property of DINGS' and without the written authorization of DINGS', any copy or forwarding is prohibited.

■ DINGS' reserves the right to make changes without further notification to any products herein to improve the reliability, function or design.

■ DINGS' reserves the final interpretation.

Jiangsu DINGS' Intelligent Control Technology Co., Ltd.