


CE 6E2103BS14-50RNN-101
 DINGS' MOTION
 RoHS work order
 DATE REV00

REVISION			
REV.	DATE	DESCRIPTION	DRAWN BY

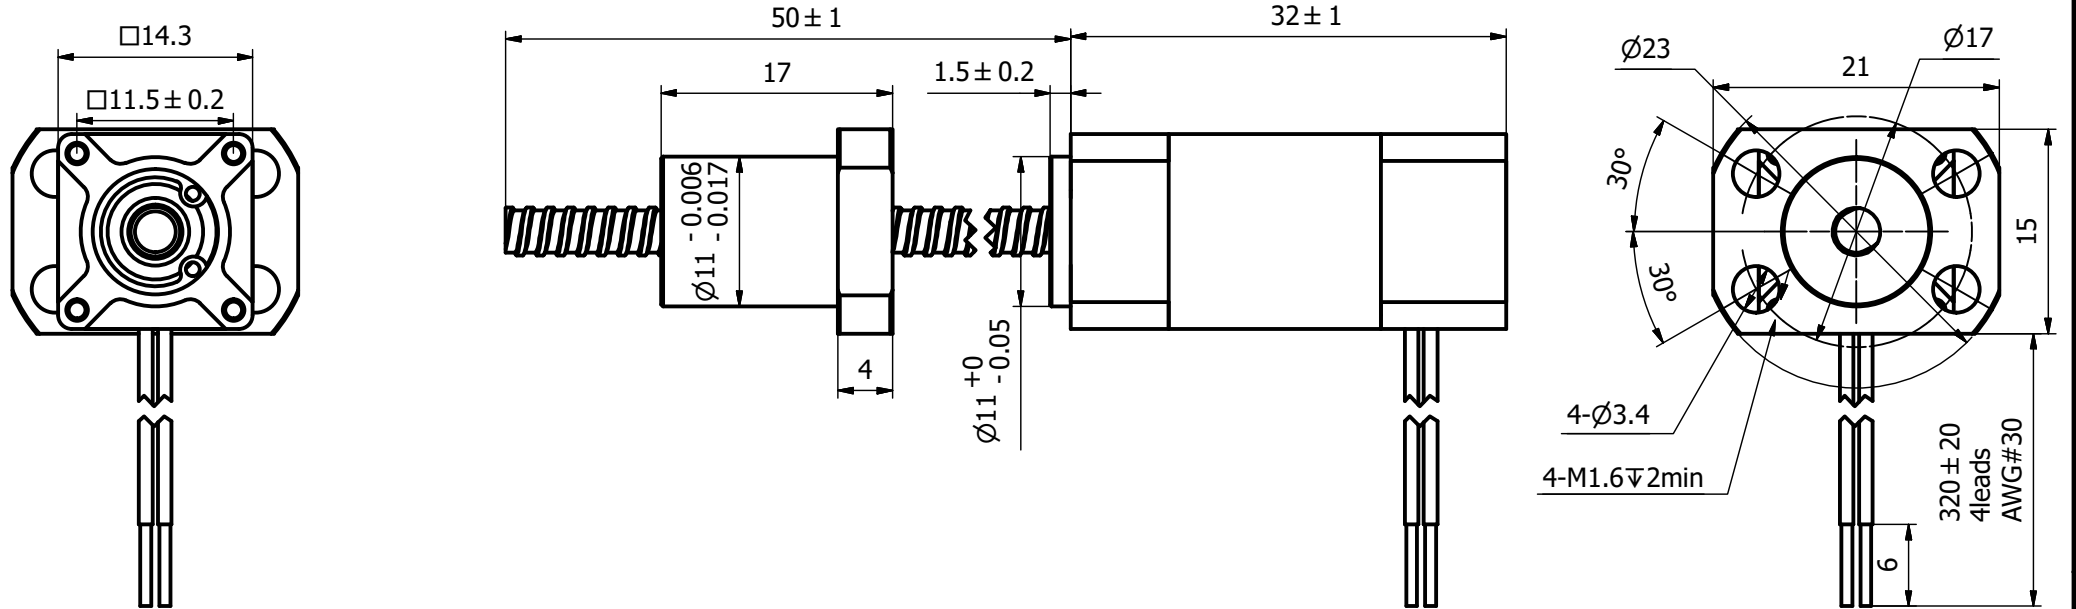

Motor's phase	2
Step angle	1.8°
Rated current/phase	0.3A
Resistance/phase	22Ω±10%
Inductance/phase	4.5mH±20%
Linear travel per step	0.005mm/step
Ball screw diameter	Φ4mm
Ball screw lead	1mm
Grade	C7(DK)
Insulation class	B
Insulation resistance	100MΩ(500VDC)
Motor weight	0.06 kg

Notes,
 1.To maximize output force and life of linear actuators,
 radial load on lead screws should be avoided or be kept at a minimum.

CUSTOMER		NOTICE TO PERSONS RECEIVING THIS DRAWING <small>THIS DRAWING IS ONLY CONDITIONALLY ISSUED, AND FOR THE SOLE PURPOSE OF INFORMING LICENSEES AND ASSOCIATE CONTRACTORS OF DINGS' MOTION, AND VENDORS THERETO AND CUSTOMERS THEREOF, RECEIPT OR POSSESSION THEREOF DOES NOT CONFER TO TRANSFER ANY RIGHT IN THE SUBJECT MATTER OF THE DRAWING. THE DESIGN, CONSTRUCTION, TECHNICAL INFORMATION AND ALL OTHER SUBJECT MATTER SHOWN IN THIS DRAWING ARE AND REMAIN, EXCEPT AS MAY BE OTHERWISE INDICATED BY WRITTEN NOTICE HEREON, THE EXCLUSIVE PROPERTY OF SAID CORPORATION. THIS DRAWING MAY BE REPRODUCED ONLY BY LICENSEES AND ASSOCIATE CONTRACTORS OF SAID CORPORATION AND ONLY FOR LICENSED MANUFACTURE, AND BY VENDORS MANUFACTURING FOR SAID CORPORATION AND ONLY FOR LICENSEES AND ASSOCIATE CONTRACTORS.</small>																																																													
WIRING CHART		EXCITATION SEQUENCE				UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE AS BELOW PER ISO2768-ck.		DRAWN Kevin DATE 2023/10/9		DINGS																																																					
		<table border="1"> <tr> <td>CW</td> <td colspan="4">→</td> </tr> <tr> <td>Black A+</td> <td>+</td> <td></td> <td>-</td> <td></td> </tr> <tr> <td>Green A-</td> <td>-</td> <td></td> <td>+</td> <td></td> </tr> <tr> <td>Red B+</td> <td></td> <td>+</td> <td></td> <td>-</td> </tr> <tr> <td>Blue B-</td> <td></td> <td>-</td> <td></td> <td>+</td> </tr> <tr> <td>CCW</td> <td colspan="4">←</td> </tr> </table>				CW	→					Black A+	+		-		Green A-	-		+		Red B+		+		-	Blue B-		-		+	CCW	←				<table border="1"> <thead> <tr> <th colspan="2">LINEAR</th> <th colspan="2">ANGULAR</th> </tr> </thead> <tbody> <tr> <td>0~3</td> <td>±0.2</td> <td>0~10</td> <td>±1.5°</td> </tr> <tr> <td>3~6</td> <td>±0.5</td> <td>10~50</td> <td>±1°</td> </tr> <tr> <td>6~30</td> <td>±0.8</td> <td>50~120</td> <td>±30'</td> </tr> <tr> <td>30~120</td> <td>±1.5</td> <td>120~400</td> <td>±15'</td> </tr> </tbody> </table>		LINEAR		ANGULAR		0~3	±0.2	0~10	±1.5°	3~6	±0.5	10~50	±1°	6~30	±0.8	50~120	±30'	30~120	±1.5	120~400	±15'	<table border="1"> <tr> <td>APPRVD</td> <td>DATE</td> </tr> <tr> <td></td> <td></td> </tr> </table>		APPRVD	DATE	
CW	→																																																														
Black A+	+		-																																																												
Green A-	-		+																																																												
Red B+		+		-																																																											
Blue B-		-		+																																																											
CCW	←																																																														
LINEAR		ANGULAR																																																													
0~3	±0.2	0~10	±1.5°																																																												
3~6	±0.5	10~50	±1°																																																												
6~30	±0.8	50~120	±30'																																																												
30~120	±1.5	120~400	±15'																																																												
APPRVD	DATE																																																														
		MODEL 6E2103BS14-50RNN-101		SIZE A3 SHEET 1 OF 1		SCALE 1: 1 REV 00																																																									