






E15PC34-0.5-4-61-001



DINGS' MOTION yyyy/mm/dd

CUSTOMER APPROVE


Rev	Zone	Description	By	Date
0		Initial release		
1				
2				

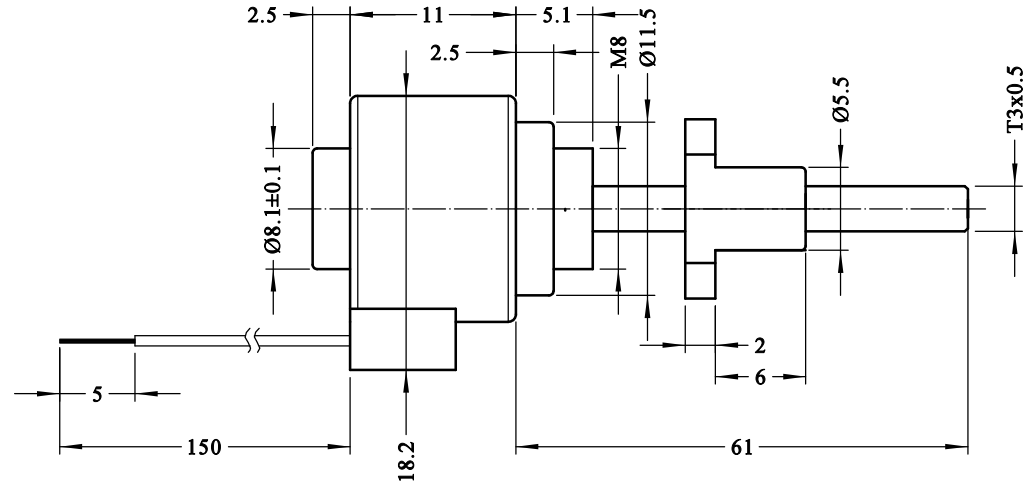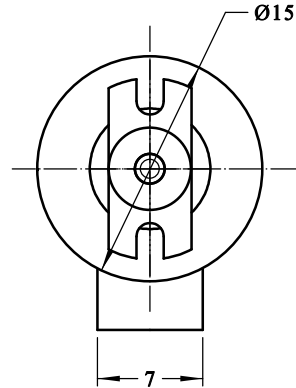

POWER	W	1.6
VOLTAGE	V	4
PHASE CURRENT	mA	200
PHASE RESISTANCE	Ohm / 20C	20(±10%)
PHASE INDUCTANCE	mH / 1kHz	5.6(±20%)
STEP ANGLE	°	18
SCREW LEAD	mm	0.5
STEP TRAVEL	mm	0.025
LINEAR FORCE	N / 300PPS	TBD
SCREW LENGTH	mm	61
INSULATION RESISTANCE	M Ω (DC 500V)	20
INSULATION CLASS		B
OPERATING TEMP RANGE	°C	-20~+55°C
STORANG TEMP RANGE	°C	-40~+100°C
MASS	g	35

0.1*55

WIRING CHART EXCITING SEQUENCE

UL1061
28AWGEXTENT
RETRACT

A	+	-	-	+
A'	-	+	+	-
B	-	-	+	+
B'	+	+	-	-

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE IN MILLIMETERS AND
TOLERANCES ARE AS BELOW PER ISO2768-mK.

LINEAR		ANGULR	
0 ~ 3	±0.2	0 ~ 10	±1.5°
3 ~ 6	±0.5	10 ~ 50	±1°
6 ~ 30	±0.8	50 ~ 120	±30'
30 ~ 120	±1.5	120 ~ 400	±15'

DRAWN
APPRVD
MODEL

HU

DATE

2023/8/24

DATE

E15PC34-0.5-4-61-001

SIZE

A4

SHEET


1 OF 1

SCALE

2:1

REV

0



NOTICE TO PERSONS RECEIVING THIS DRAWING

THIS DRAWING IS ONLY CONDITIONALLY ISSUED, AND FOR THE SOLE PURPOSE OF INFORMING LICENSEES AND ASSOCIATE CONTRACTORS OF DINGS' MOTION, AND VENDORS THERETO AND CUSTOMERS THEREOF, RECEIPT OR POCESSION THEREOF DOES NOT CONFER TO TRANSFER ANY RIGHT IN THE SUBJECT MATTER OF THE DRAWING. THE DESIGN, CONSTRUCTION, TECHNICAL INFORMATION AND ALL OTHER SUBJECT MATTER SHOWN IN THIS DRAWING ARE AND REMAIN, EXCEPT AS MAY BE OTHERWISE INDICATED BY WRITTEN NOTICE HEREON, THE EXCLUSIVE PROPERTY OF SAID CORPORATION. THIS DRAWING MAY BE REPRODUCED ONLY BY LICENSEES AND ASSOCIATE CONTRACTORS OF SAID CORPORATION AND ONLY FOR LICENSED MANUFACTURE, AND BY VENDORS MANUFACTURING FOR SAID CORPORATION AND ONLY FOR LICENSEES AND ASSOCIATE CONTRACTORS.

DINGS 鼎智