



REVISION

REV. DATE DESCRIPTION DRAWN BY



 $\phi$ 32±0.1

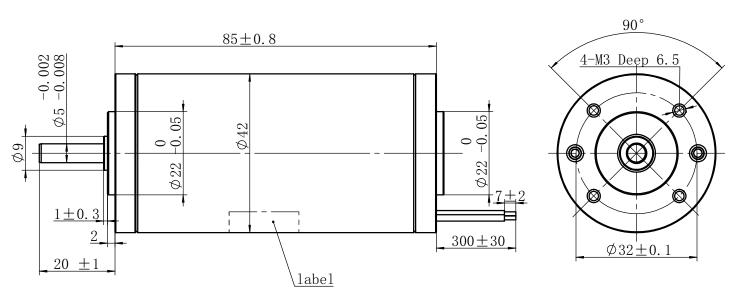

Voltage	24	VDC
No-load speed	$3800 \pm 10\%$	RPM
No-load current	< 0.25	A
Rated speed	$3100 \pm 10\%$	RPM
Rated current	<1.5	A
Rated torque	0. 057	N. m
Rated power	20	W
Insulation class	В	

											Inbai	acron	CIGE	, 5		ь
CUSTOMER WIRING CHART	EXCITII	ng seque	NOTICE TO PERSONS RECEIVING THIS DRAWING  THIS DRAWING IS ONLY CONDITIONALLY ISSUED, AND FOR THE SOLE PURPOSE OF INFORMING LICENSEES AND ASSOCIATE CONTRACTORS OF DINGS' MOTION, AND VENDORS THERETO AND CUSTOMERS THEREOF, RECEIPT OR POCESSION THEREOF DOES NOT CONFER TO TRANSFER ANY RIGHT IN THE SUBJECT MATTER OF THE DRAWING. THE DESIGN, CONSTRUCTION, TECHNICAL INFORMATION AND ALL OTHER SUBJECT MATTER SHOWN IN THIS DRAWING ARE AND REMAIN, EXCEPT AS MAY BE OTHERWISE INDICATED BY WRITTEN NOTICE HEREON, THE EXCLUSIVE PROPERTY OF SAID CORPORATION. THIS DRAWING MAY BE REPRODUCED ONLY BY LICENSEES AND ASSOCIATE CONTRACTORS OF SAID CORPORATION AND ONLY FOR LICENSEES AND ASSOCIATE CONTRACTORS.													
+	UL 3239 22AWG	+	Red	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE AS BELOW PER ISO2768-cK.			DRAWN	Li	DATE	2024/11/1						
$M \longrightarrow M$				LINEAR ANGULAR		JLAR	APPRVD	Chen	DATE	2024/11/1 <b>D</b>					45	
				0∼3	±0.2	0~10	±1.5°		42ZYTC85-1 SCAL			CIZE		CLIEET	2 /2	1
		- B		3∼6	±0.5	10~50	±1°	MODEL				SIZE	A4	SHEET	Γ 2/2	
			Black	6∼30	±1	50~120	±30'	MODEL				SCALE	1:2	REV.	00	
				30~120	±2	120~400	±15'					SCALL	1.2	IXLV.	00	1