
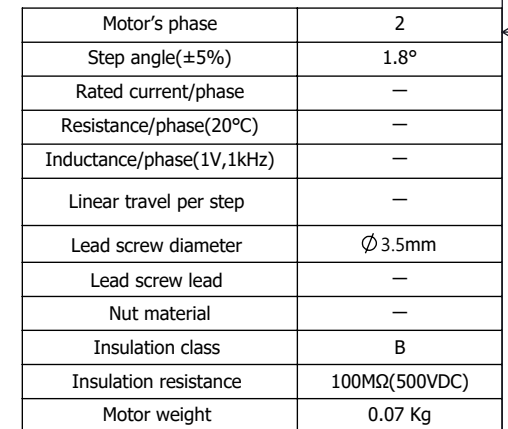



DINGS' MOTION
work order
DATE REV00

REVISION			
REV.	DATE	DESCRIPTION	DRAWN BY



Notes,
1.To maximize output force and life of linear actuators,
radial load on lead screws should be avoided or be kept at a minimum.

CUSTOMER		NOTICE TO PERSONS RECEIVING THIS DRAWING																
WIRING CHART		THIS DRAWING IS ONLY CONDITIONALLY ISSUED, AND FOR THE SOLE PURPOSE OF INFORMING LICENSEES AND ASSOCIATE CONTRACTORS OF DINGS' MOTION, AND VENDORS THERETO AND CUSTOMERS THEREOF, RECEIPT OR POSSESSION THEROF DOES NOT CONFER TO TRANSFER ANY RIGHT IN THE SUBJECT MATTER OF THE DRAWING. THE DESIGN, CONSTRUCTION, TECHNICAL INFORMATION AND ALL OTHER SUBJECT MATTER SHOWN AND ASSOCIATE CONTRACTORS OF SAID CORPORATION AND ONLY FOR LICENSED MANUFACTURE, AND BY VENDORS MANUFACTURING FOR SAID CORPORATION AND ONLY FOR LICENSEES AND ASSOCIATE CONTRACTORS.																
		EXCITATION SEQUENCE				UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE AS BELOW PER ISO2768-cK.				DRAWN		DATE						
		CW		→						APPRVD		DATE						
		Red A+	+		-		LINEAR		ANGULAR		MODEL	8K22		SIZE	A3	SHEET	1 OF 1	
		Red/wht A-	-		+		0 ~ 3	±0.2	0 ~ 10	±15'								
		Grn B+		+		-	3 ~ 6	±0.5	10 ~ 50	±30'								
		Grn/wht B-		-		+	6 ~ 30	±0.8	50 ~ 120	±1°								
		CCW	←			30 ~ 120	±1.5	120 ~ 400	±1.5°									