
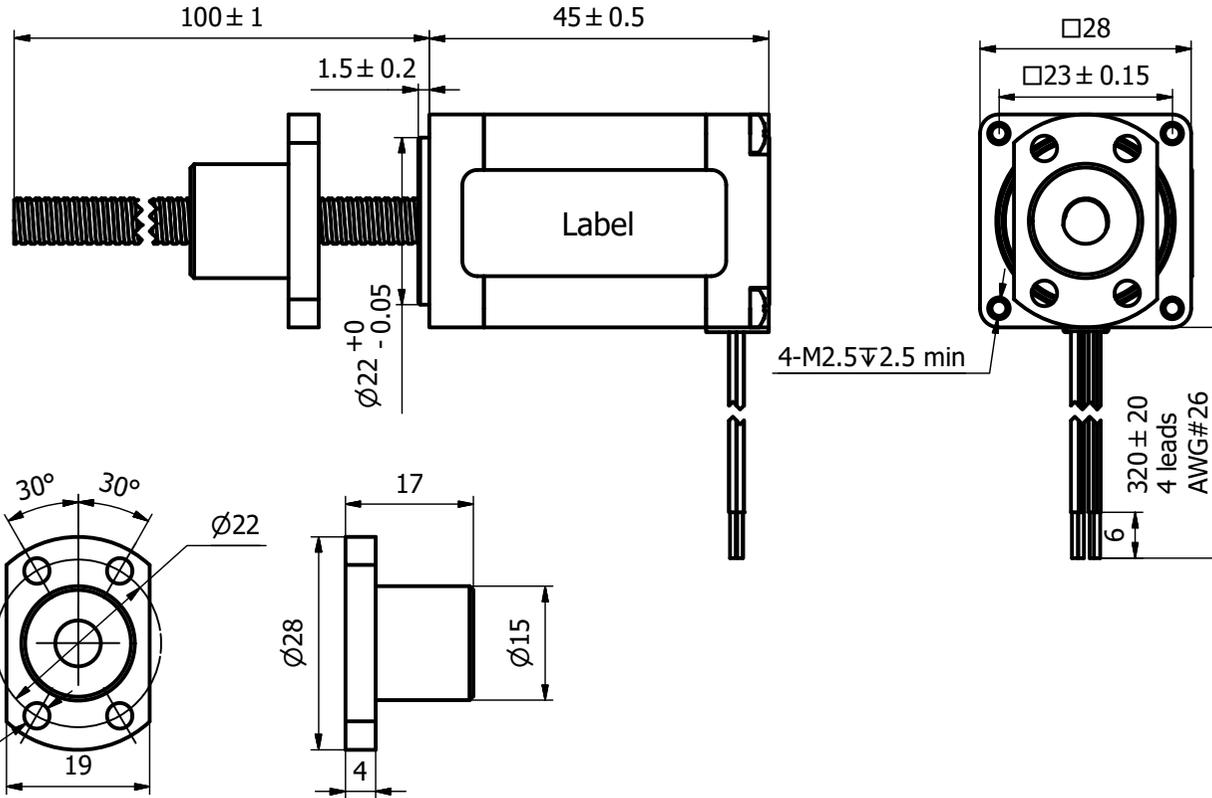


CE 11E2210BS24-100  
 DINGS' MOTION  
 RoHS Work order  
 DATE REV00

REVISION			
REV.	DATE	DESCRIPTION	DRAWN BY

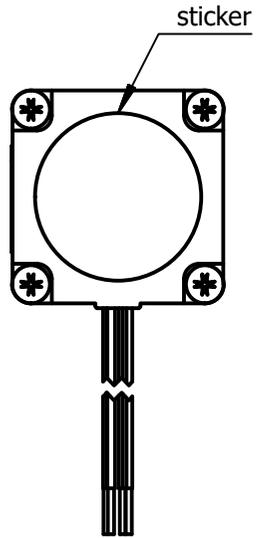

Motor's phase	2
Step angle	1.8°
Rated current/phase	0.95 A
Resistance/phase	4.1Ω±10%
Inductance/phase	4.0 mH±20%
Linear travel per step	0.01mm/step
Ball screw diameter	Φ6.0mm
Ball screw lead	2.0mm
Grade	C7(KSS)
Insulation class	B
Insulation resistance	100MΩ(500VDC)
Heat rise	80°C
Motor weight	0.18 kg

**Notes,**  
 1.To maximize output force and life of linear actuators,  
 radial load on lead screws should be avoided or be kept at a minimum.

NOTICE TO PERSONS RECEIVING THIS DRAWING  
 THIS DRAWING IS ONLY CONDITIONALLY ISSUED, AND FOR THE SOLE PURPOSE OF INFORMING LICENSEES AND ASSOCIATE CONTRACTORS OF DINGS' MOTION, AND VENDORS THERE TO AND CUSTOMERS THERE OF,  
 RECEIPT OR POSSESSION THERE OF DOES NOT CONFER TO TRANSFER ANY RIGHT IN THE SUBJECT MATTER OF THE DRAWING. THE DESIGN, CONSTRUCTION, TECHNICAL INFORMATION AND ALL OTHER SUBJECT MATTER SHOWN  
 IN THIS DRAWING ARE AND REMAIN, EXCEPT AS MAY BE OTHERWISE INDICATED BY WRITTEN NOTICE HEREON, THE EXCLUSIVE PROPERTY OF SAID CORPORATION. THIS DRAWING MAY BE REPRODUCED ONLY BY LICENSEES  
 AND ASSOCIATE CONTRACTORS OF SAID CORPORATION AND ONLY FOR LICENSED MANUFACTURE, AND BY VENDORS MANUFACTURING FOR SAID CORPORATION AND ONLY FOR LICENSEES AND ASSOCIATE CONTRACTORS.

<b>CUSTOMER</b>		<b>EXCITING SEQUENCE</b>						<b>DINGS'</b>			
<b>WIRING CHART</b>		CW				DRAWN Galen		DATE 2022/12/28		SIZE A3 SHEET 1 OF 1	
	Red A+	+	-	LINEAR		ANGULAR		APPRVD	DATE	MODEL 11E2210BS24-100	SCALE 1: 1 REV 00
	Red/wht A-	-	+	0~3	±0.2	0~10	±1.5°				
	Green B+		+	3~6	±0.5	10~50	±1°				
	Grn/wht B-		-	6~30	±0.8	50~120	±30'				
	CCW			30~120	±1.5	120~400	±15'				

