



REVISION											
REV.	DATE	DESCRIPTION	DRAWN BY								

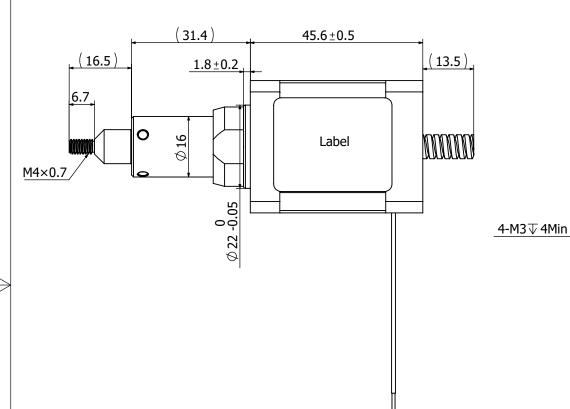

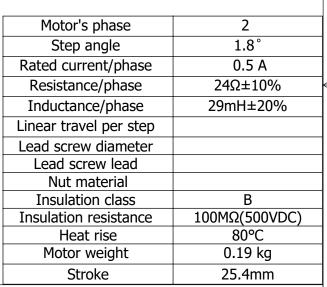

Notes,

1.To maximize output force and life of linear actuators, radial load on lead screws should be avoided or be kept at minimum.

CUSTOMER WIRING CHART	EXCITING SEQUENCE				NOTICE TO PERSONS RECEIVING THIS DRAWING THIS DRAWING IS ONLY CONDITIONALLY ISSUED, AND FOR THE SOLE PURPOSE OF INFORMING LICENSEES AND ASSOCIATE CONTRACTORS OF DINGS' MOTION, AND VENDORS THERETO AND CUSTOMERS THEREOF, RECEIPT OR POCESSION THEREOF DOES NOT CONFER TO TRANSFER ANY RIGHT IN THE SUBJECT MATTER OF THE DRAWING. THE DESIGN, CONSTRUCTION, TECHNICAL INFORMATION AND ALL OTHER SUBJECT MATTER SHOWN IN THIS DRAWING ARE AND REMAIN, EXCEPT AS MAY BE OTHERWISE INDICATED BY WRITTEN NOTICE HEREON, THE EXCLUSIVE PROPERTY OF SAID CORPORATION. THIS DRAWING MAY BE REPRODUCED ONLY BY LICENSEES AND ASSOCIATE CONTRACTORS OF SAID CORPORATION AND ONLY FOR LICENSEED MANUFACTURE, AND BY VENDORS MANUFACTURING FOR SAID CORPORATION AND ONLY FOR LICENSEES AND ASSOCIATE CONTRACTORS.														
A+ —	CW	\longrightarrow				UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE AS BELOW PER ISO2768-ck.			DRAWN		DATE					\overline{T}	<u> </u>	<u>'</u> .	
	RED A+	+		-		LINEAR ANGULAR		APPRVD		DATE			u	ING5					
mmm	Red/wht A-	-		+		0~3	±0.2	0~10	±15′										
	Green B+		+		_	3~6 ±0.5 10~50 ±30′		±30'					SIZE	A3	SHEET	1/1			
	Grn/wht B-		_		+					P/N	14K2205-100SMSN			-			{	-(
± ±	CCW			6~30	±0.8	50 ~ 120	±1°] [SCALE	SCALE 1:1	REV.	00		\downarrow			
8 8			\leftarrow			30 ~ 120	±1.5	120 ~ 400	±1.5°					JOSTILL	33,122				'

□35 □26±0.2

> 320 ± 20 4Leads AWG#26